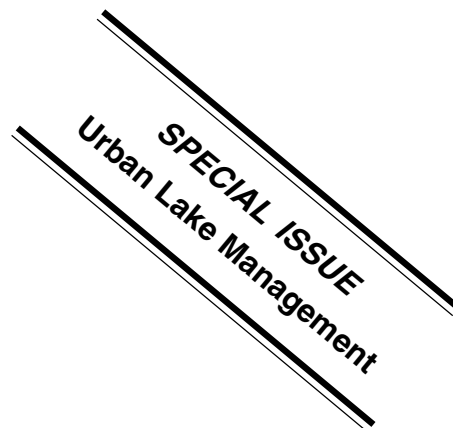

Watershed Protection Techniques

Urban Lake Management



A Periodic Bulletin on Urban Watershed Restoration and Protection Tools

Vol. 3, No. 4 — December 2001

Feature Articles

From the Editor's Desk	745
Why Urban Lakes Are Different	747
Crafting a Lake Protection Ordinance	751

Managing Phosphorus Inputs Into Lakes

Introduction	769
I. Determining the Trophic State of Your Lake.....	771
II. Crafting an Accurate Phosphorus Budget for Your Lake.....	782
III. Evaluating the Impact of Watershed Treatment	791

Managing Lakes for Pure Drinking Water.....	797
In-Lake Treatment to Restore Urban Lakes.....	813
The Influence of Septic Systems at the Watershed Level.....	821
Land Use/Impervious Cover Relationships in the Chesapeake Bay.....	835

Resources

New Resources from the Center for Watershed Protection	841
--	-----

A Publication of the





Headquarters:
8391 Main Street
Ellicott City, MD 21043
Tel: 410-461-8323
Fax: 410-461-8324
Email: center@cwpp.org
Web: www.cwpp.org

Watershed Protection Techniques (ISSN: 1073-9610) is published by the Center for Watershed Protection. No part of this publication may be reproduced without the consent of the Editor.

Editor in Chief: Thomas R. Schueler

Board of Directors

Uri P. Avin

The HNTB Companies

J. Keith Bowers (*Treasurer*)

Biohabitats, Inc.

Ray Culter (*President*)

The Nature Conservancy, Inc.

Elizabeth Hickey

Environmental Finance Center

Diane Hoffman

Northern VA Soil & Water Conservation

George Holback (*Secretary*)

Cho, Benn & Holback

Bob Kaufman

Michael T. Rose

Bill Matuszeski

James W. Meek

Environmental Consultant

Glenn G. Page (*Vice President*)

National Aquarium in Baltimore

Kristin A. Pauly

Prince Charitable Trusts

Elizabeth Raisbeck

National Parks Conservation Association

William Stack

Baltimore Department of Public Works

William Street

Chesapeake Bay Foundation

Bob Tucker

Struever Brothers Eccles & Rouse

Victoria Woodard

Safe Waterways in Maryland

Senior Staff

Thomas R. Schueler (*Executive Director*)

Hye Yeong Kwon (*Assistant Director*)



Watershed Protection Techniques

Special Urban Lake Management Edition

Volume 3, Number 4 — December 2001

VISIT US ON THE WEB

www.cwp.org



CITATION FOR ARTICLES AND NOTES IN THIS VOLUME:

Name of author(s). 2001. Title of article. Wat. Prot. Techniques. 3(4): page nos.

Points of view, information and opinions expressed in this bulletin do not necessarily reflect the views or policies of the Center for Watershed Protection, the editors, publishers, nor any sponsors or contributors to this publication. Articles and Notes are reviewed by the Editorial Board for technical accuracy and are accepted for publication to promote greater discussion and communication among watershed practitioners. Mention of trade names and commercial products does not constitute endorsement of their use.

Individual copies of this special urban lakes issue of *Watershed Protection Techniques* are available from the Center for Watershed Protection for \$15 each. Depending on availability, back issues of *Watershed Protection Techniques* can be purchased online from the Center for Watershed Protection's website at www.cwp.org. Articles and tech notes from past issues spanning 1994 - 2000 have been compiled into *The Practice of Watershed Protection*, which is also available from the Center's website.

Center for Watershed Protection

8391 Main Street

Ellicott City, Maryland 21043

Phone: 410-461-8323

Fax: 410-461-8324

Email: center@cwp.org

www.cwp.org

Printed on processed chlorine-free recycled paper using soybean inks which are specially formulated to be free from environmentally-toxic metals. Throughout the printing process the solvents, cleaning agents, and other chemicals were chosen for their minimal impact on the environment.

©2001 by the Center for Watershed Protection. Material may be quoted provided credit is given. Printed in the United States of America.

ISSN: 1073-9610

From the Editor's Desk



Who doesn't like a lake? Most of us find the placid and tranquil waters of lakes strongly appealing, and jump at the chance to spend leisure time in, on, or around them. Many of us also depend on lakes and reservoirs as the source of our drinking water. However, it is this very attraction to lakes that can greatly diminish both their scenic and recreational values and the purity of the water we drink, as our collective enchantment inexorably leads to extensive development and increased pollutant loads. Quite simply, lake quality usually declines when its contributing watershed is developed.

In This Issue

This special issue of *Techniques* is devoted to defining how development impacts lakes and reservoirs, and examining ways to reduce these impacts with watershed management practices. The issue has been literally years in the making, which is not surprising given the scope and magnitude of the topic. And certainly, the tools of watershed management change radically when the focus is shifted from protecting streams and rivers to lake quality.

Since we tend to be lotic rather than lentic in our thinking at the Center, we had a lot to learn and synthesize. What we learned first, and argue in our first article, *Why Urban Lakes are Different*, is that urban lakes behave quite differently than other lakes, and deserve a special watershed management approach. A key element of this approach is outlined in *Managing Phosphorus Inputs Into Lakes*, a series of three articles designed to help lake managers forecast how their lake will respond to these inputs, craft realistic phosphorus budgets, and predict how much watershed treatment practices can help. Phosphorus has always been the main currency of lake managers, and urban watersheds usually generate excessive loads of this element, which normally controls lake productivity. Consequently, lake managers need to aggressively manage all sources of phosphorus at the watershed level if they are to prevent a blue lake from turning green, or a green lake from getting even greener.

Shoreline development around lakes is often intense, and requires special oversight. With this in mind, *Crafting A Lake Protection Ordinance* provides practical insights on how to regulate development along

the shoreline and in the contributing watershed of a lake. Watershed management becomes absolutely essential when a lake or reservoir serves as a source of drinking water. *Managing Watersheds for Pure Drinking Water* details the many ways that watershed development can threaten drinking water quality, and reports on the extraordinary watershed protection practices that communities have undertaken to preserve their water supplies.

Past development has already rendered many urban lakes highly eutrophic, forcing lake managers to directly confront the symptoms of eutrophication in the form of algal blooms, aquatic weeds and reduced water clarity. Techniques to combat these problems are profiled in the article *In-lake Treatment to Restore Urban Lakes*. As septic systems are major potential pollutants of both lakes, water supplies and coastal waters as well, the most recent research data on this enigmatic pollutant source are reported in the *Influence of Septic Systems at the Watershed Level*. Finally, *Land Use/Impervious Cover Relationships in the Chesapeake Bay* describes simple tools watershed managers can use to forecast current and future impervious cover in small watersheds.

The Future of *Techniques*

This publication constitutes the last issue of the third volume of *Watershed Protection Techniques*. Beginning next year, *Techniques* will shift from a subscriber-based journal to an occasional monograph that is published once every 12 to 15 months or so. Our goal is to sharpen our focus and report on specific techniques to protect special watersheds such as estuaries, trout streams and degraded urban streams. While less frequent, *Techniques* will continue to feature the latest research on urban watersheds and the performance of techniques to protect and restore them. For those of you who need a more frequent Center fix, our free e-newsletter *Runoff Rundown* will continue to be transmitted every three or four months and will contain watershed news, Center project and research updates, and a few short articles or

Beginning next year, *Techniques* will shift to an occasional monograph that is published once every 12 to 15 months or so.

technical notes. If you want to subscribe, please forward your e-mail address to us at center@cwpc.org and we will add you to our list of e-mail subscribers. Lastly, I would like to invite you to become a Friend of the Center, and directly support our watershed protection efforts. Details on how you can become a Friend of the Center and the benefits of being a Friend can be found on our website at www.cwpc.org.

On a personal note, I have immensely enjoyed my job as editor of *Techniques*, and am grateful for both your patience and support as we produced 12 issues over the last eight years (at the stunning rate of one and a half issues per year). In my first "From the Editors Desk" message in 1994, I remarked that a new practice of protecting and restoring urban watersheds was just emerging out of the research and experience of more than a dozen different professional disciplines. Last year, we managed to distill the vast body of knowledge that we've gained since then into the *Practice of Watershed Protection*, a comprehensive reference that compiles nearly 150 of the best feature articles and technical notes that appeared in the first eleven issues of *Techniques*.

Looking over this mammoth chronicle, it's clear to me that our profession has evolved from its infancy, and is now headed towards a healthy and perhaps tumultuous adolescence. We may not be fully grown up, but we are recognizing the important dynamics of urban watersheds and are gaining confidence in applying the tools of watershed protection (although I wouldn't necessarily hand over the car keys, yet).

Techniques has played an influential role in the maturation of our practice, due in no small part to the talents and hard work of our contributors, editorial board and the hundreds of researchers and practitioners over the past eight years.

By the way, if you're missing back issues of *Techniques*, or need to find a specific article or technical note, you can now download all 150 articles compiled in *The Practice of Watershed Protection* for free from our special stormwater management website at www.stormwatercenter.net. If you prefer a hard copy as a desktop reference, you can order *The Practice* directly online from our homepage at www.cwpc.org.

Special thanks are due to many people for getting this issue to press. First, thanks are extended to Anne Weinberg from EPA for keeping the faith, and waiting nearly two years to get the special issue that she was promised. I'm also grateful to my personal lake mentor, Jon Simpson of TetraTech, Inc., for his insights and contributions to the issue. Tom Davenport, of EPA, provided his customary thorough review, as well as the article on lake restoration techniques. I also want to recognize the hard work and diligent research performed by Center staff, most notably Ted Brown, Karen Capiella, Deb Caraco, Anne Kitchell, Paul Sturm and Chris Swan. Lastly, I would be remiss without thanking Heather Holland for her talents in producing the issue.

—TRS

Introduction: Why Urban Lakes Are Different

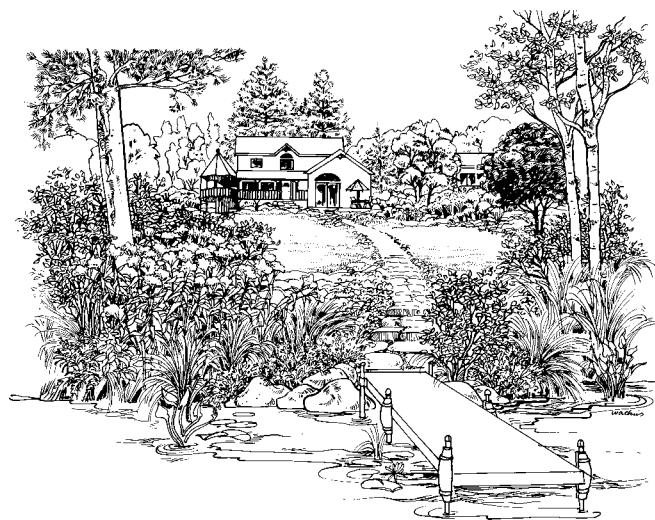
by Tom Schueler and Jon Simpson

What Exactly Are Urban Lakes?

For the purposes of watershed management, urban lakes are defined by six operational criteria. First, they tend to be rather small, and generally have a surface area of 10 square miles or less (this excludes larger lakes). Second, they tend to be shallow, with an average depth of 20 feet or less. Third, they have a watershed area/drainage area ratio of at least 10:1, meaning that their watersheds exert a strong influence on the lake. Fourth, the lake watershed must contain at least 5% impervious cover as an overall index of development. Fifth, whether natural or man-made, the lake must be managed for recreation, water supply, flood control or some other direct human use. Finally, our definition excludes several types of lakes with unique hydrology or nutrient cycling. These include solution lakes that are strongly influenced by groundwater, the rare nitrogen-limited lakes, saline lakes and playa lakes. While these lake types can be found in urban areas, it is not clear whether they share the same water quality response to watershed development as other freshwater lakes.

Curiously, the unique problems and conditions of urban lakes have received little attention in the limnological and watershed management literature. This is particularly surprising given that many of our management efforts are devoted to lakes and reservoirs that are distinctly urban in character. While the watershed management literature is replete with phosphorus budgets and watershed models, it is very unusual to find generalizations about the influence of watershed development on lake quality. Instead, urban land use is generally confined to a line item in a phosphorus budget, and it is exceptionally rare to find studies that have tracked changes in lake quality as a function of watershed development over time.

Similarly, limnologists tend to treat the influence of a watershed on its lake as a constant, and devote most of their attention to the internal dynamics within each individual lake. From their perspective, lakes, as a group, defy easy classification. For example, Hutchinson (1957) described some 76 types of lakes, simply based on their geomorphic origin. Other have classified lakes primarily on the basis of their trophic state. Indeed, lakes differ so much in their size, depth,



drainage area/surface ratio, water balance, nutrient cycling and trophic state that there is a tendency to treat each individual lake as unique. Consequently, urban lakes are seldom viewed as a distinct class, much less as a special watershed management category.

While the diversity of lakes is great, we argue that the impact of watershed development on lake quality is so pervasive that it is worth treating urban lakes as a distinct group, particularly from an applied watershed management perspective. Certainly urban lakes do share some common characteristics, which are profiled below.

Many Urban Lakes Are Man-made

The number of natural lakes in the continental United States has been estimated at more than 100,000 (NALMS, 2001). By contrast, Van der Leeden *et. al* (1990) report that precisely 2,654 reservoirs exist in the U.S. While this number is small relative to the number of natural lakes, reservoirs occupy more than 30,000 square miles in surface area. A significant proportion of these constructed reservoirs meet our urban lake definition, particularly east of the Mississippi. The key differences between natural lakes and constructed reservoirs have been extensively studied by Wetzel (1990), Thornton (1984), and Kimmel and Groeger (1984), and these differences are profiled in Table 1.

Reservoirs have several striking geometrical differences from lakes. First, reservoir watersheds are often much greater in area in relation to their water surface area, which means that their watersheds often exert a greater influence over the lake. One direct consequence of this expanded area is that reservoirs tend to have a shorter hydraulic residence time. Fur-

The impact of watershed development on lake quality is so pervasive that it is worth treating urban lakes as a distinct group.

thermore, since most reservoirs are formed by placing a dam across a stream network, they tend to have much longer shorelines, and tend to be deeper than natural lakes as well.

Urban Lakes are Greener Than Non-urban lakes

According to the US EPA (1986), half of all U.S. lakes are classified as either eutrophic or hyper-eutrophic. However, of the 3,700 urban lakes evaluated by the US EPA (1980), the percentage that are eutrophic or hyper-eutrophic exceeds 80%. Quite simply, urban lakes tend to receive higher phosphorus loads, and all other factors being the same, become more eutrophic than non-urban lakes.

This is due to the fact that urban watersheds produce higher unit area phosphorus loads from stormwater runoff, compared to other watersheds (see Caraco and Brown, this issue). In addition, most urban watersheds produce significant secondary phosphorus loads from a diverse range of sources including municipal wastewater discharges, failing septic systems and sewage overflows. Urban lakes also have many unique internal phosphorus sources such as geese droppings, boat sewage and sediment release.

Given such high phosphorus loads, it does not take much uncontrolled development in the watershed of an urban lake to quickly accelerate the eutrophication process. For example, stormwater runoff from watershed development begins to exceed background phosphorus loads at 4%, 17% and 40% impervious

cover for forested, rural and agricultural watersheds, respectively (Caraco, this issue). However, these thresholds can be approximately doubled if stormwater treatment practices and better site design are effectively applied across the watershed.

Algal Blooms or Aquatic Weeds?

Urban lake managers should carefully diagnose the ecology of their urban lakes to determine if they are primarily dominated by algae or aquatic weeds. Many urban lakes are dominated by dense growths of aquatic weeds, because they are quite shallow, and influenced by nutrient rich bottom sediments. In recent years, an increasing number of invasive, non-native species have spread into these littoral habitats, including Eurasian watermilfoil, hydrilla, and water hyacinth to name but a few of the successful invaders. These species create dense beds of aquatic weeds that cause nuisance conditions for lake users, making it unpleasant to swim, hard to operate boats, and difficult to maintain open water areas.

Aquatic weeds present a great challenge to the lake manager, since they are often more resistant to traditional phosphorus therapies. This is due to the fact that they derive their nutrients from bottom sediments and not the water column. As a result, aquatic weeds thrive on past phosphorus inputs but not current ones. As Cooke *et. al* (1993) notes, increased phosphorus levels in the water column are not directly linked to nuisance growths of aquatic weeds. Indeed, the density of aquatic weeds is often controlled by physical factors

Table 1. A Comparison of the Physical Properties of Natural Lakes and Reservoirs (Thornton, 1984 and Walker, 1984)

Variable	Units	Natural Lakes	Reservoirs
Number Sampled		309	107
Mean Drainage Area	acres	54,834	797,316
Mean Surface Area	acres	1383	8,251
DA/SA Ratio	--	33	93
Mean Depth	feet	13.5	20.7
Shoreline Development Ratio	ratio of the length of the shoreline to the length of the circumference of area equal to that of the lake	2.9	19
Hydraulic Residence Time	years	0.74	0.37
Secchi Depth	feet	5.1	3.3
Chlorophyll a	ug/l	10.2	9.1

Watershed treatment is an indispensable element of effective drinking water strategy.

such as the composition and texture of bottom sediments, water depths, lake levels, and most importantly, the availability of light. Once beds of aquatic weeds become established, a series of ecological factors help to sustain and reinforce their presence for many years.

Many current models used to manage lakes were originally developed for deeper, open-water lakes that are dominated by algal biomass. These tools may not be applicable to shallow lakes that are dominated by aquatic weeds (see Simpson, this issue). In particular, the basic tenet of eutrophication management for open water lakes may not always hold, namely that an external reduction in phosphorus load will reduce in-lake phosphorus concentrations, and ultimately reduce algal biomass levels.

When aquatic weeds dominate an urban lake, it is doubtful whether a phosphorus “diet” alone will achieve desired lake management goals. In these settings, lake managers may want to acquire more data on lake ecology before deciding on the next course of treatment. In particular, managers should study the ecological factors that sustain and reinforce dense populations of aquatic weeds. In most cases, lake managers must resort to in-lake treatment practices such as harvesting, dredging, water level manipulations or applications of herbicides (see Davenport and Kaynor, this issue). These practices often need to be combined with emerging “biomanipulation” practices, and the more traditional watershed treatment practices that can reduce phosphorus inputs to lake sediments (see Simpson, this issue).

Extensive Shoreline Development Pressures

As lakefront property is highly desirable, it is quite common to have intense shoreline development even in lightly developed urban watersheds. Unregulated shoreline development often clears vegetation to the waterline, replaces natural vegetation with turf, and artificially stabilizes the shoreline. This extensive alteration of the littoral zone and its natural shoreline vegetation can adversely impact both fish and wildlife (see Cappiella and Schueler, this issue). In addition, shoreline development is often served by septic systems, which under certain conditions can become secondary phosphorus loading sources. It is also difficult to treat stormwater runoff from lakefront development sites, given their close proximity to the lake. Consequently, communities often need to adopt a lake protection ordinance (LPO) to regulate how and where shoreline development can occur (see Cappiella and Schueler, this issue).



High Water Quality Standards for Drinking Water

Many urban lakes function as a source of drinking water for downstream communities. However, urban watersheds produce pathogens, DBP precursors, turbidity and chemical pollutants that tend to degrade the quality of these same source waters. Given that drinking water utilities are working under increasingly stringent water quality standards, they have discovered that watershed treatment is an indispensable element of effective drinking water treatment strategy. Simply put, urban lakes that serve as a source of drinking water require extensive watershed practices to protect public health even for filtered water supplies. Recent surveys indicate that communities have adopted very stringent watershed development regulations to ensure that these practices are implemented (see Kitchell, this issue).

Higher Turbidity Levels

Urban watersheds produce considerable sediment loads from stormwater runoff, construction sites and active channel enlargement. Consequently, urban lakes typically have higher turbidity levels than their natural counterparts (see Kimmel and Kroeger, 1984 and Table 1). The combination of higher algal levels and turbidity often reduces water clarity in urban lakes, as measured by secchi depth and other measures of water transparency. High turbidity levels are often associated with run-of-the-river reservoirs.

Diagnostic Sediment Signature

Perhaps the best way to identify an urban lake is to examine its sediments. Urban lakes tend to have bottom sediments that are enriched with nutrients, trace metals, and polycyclic aromatic hydrocarbons (PAHs). Some indication of the phosphorus-rich nature of urban lake sediments can be gleaned by looking at the quality of stormwater pond sediments. Schueler (1994) reviewed 23 studies of stormwater pond sediment chemistry and derived a median phosphorus value of 583 mg/kg. Zinc is also fairly diagnostic of urban lake sediments, which is not surprising given its high concentration in urban stormwater runoff. In fact, Callender and Rice (2000) reported that zinc levels in southeastern reservoir sediments were highly correlated with both watershed population density and vehicle miles traveled. Koppen and

Souza (1984) and Schueler (1994) also reported zinc enrichment in the bottom sediments of suburban lakes and stormwater ponds, respectively.

Van Metre *et. al* (2000) recently analyzed sediment cores from 10 urban lakes and reservoirs across the country and found that PAH levels were one to two orders of magnitude higher than pre-development sediments in the same cores. While PAH levels were only loosely correlated with watershed urbanization, they are closely related to the amount of vehicle traffic in the watershed. Indeed, Van Metre and his colleagues indicated that the majority of PAHs were created during the internal combustion process, and noted that a handful of PAH compounds routinely exceeded interim freshwater sediment quality criteria.

Focus on In-Lake Treatment to Control Symptoms of Eutrophication

Because highly urban lakes have high phosphorus loads and many concerned shoreline owners, they are often the subject of intensive in-lake management efforts to control the symptoms of eutrophication, such as nuisance algal blooms. In-lake treatment techniques include dredging, aeration, alum treatment, copper sulfate applications, hypolimnetic withdrawal or, more rarely, herbicide treatment (McComas, 1993; Payne *et. al*, 1991 and Davenport and Kaynor, this issue). While these in-lake measures are mostly palliative in nature, they often represent the only feasible and cost-effective way to manage our most urbanized lakes. The continuous cost of in-lake management techniques should serve as a powerful reminder that eutrophication is best managed at the watershed level, through preventative practices.

Each Urban Lake Is Unique

Having made the case that urban lakes merit special attention from a watershed management perspective, it should be stressed that no two urban lakes are the same. Every urban lake will experience a different level of watershed development, and will exhibit a different response to phosphorus loads based on its internal geometry and contributing watershed area. In addition, the water quality goals for each urban lake will differ based on its intended uses (recreation, water supply, flood control, etc.) and its current trophic state. Consequently, lake managers will need to develop a unique watershed plan for each urban lake.

The remainder of this special issue provides detailed information to guide lake managers in formulating plans to protect or restore urban lakes. The following articles set forth a comprehensive approach for regulating new development in lake watersheds, and provide practical methods and tools that can be adapted to meet the unique conditions of each urban lake.

References

- Callender, E. and K. Rice. 2000. "The Urban Environmental Gradient: Anthropogenic Influences on the Spatial and Temporal Distribution of Lead and Zinc in Sediments." *Environmental Science and Technology*. 34(2): 232-238.
- Cooke, G.D., E. B. Welch, S.A. Peterson and P.R. Newroth. 1993. *Restoration and Management of Lakes and Reservoirs*. 2nd Edition. Lewis Publishers, Boca Raton, FL.
- Hutchinson, G. 1957. *A Treatise on Limnology: Volume 1: Geography, Physics and Chemistry*. John Wiley and Sons, Inc. New York.
- Kimmel, B. and A. Groeger. 1984. "Factors Controlling Primary Production in Lakes and Reservoirs." In *Lake and Reservoir Management*. US EPA 440-5-84-001. pp. 272-278.
- Koppen, J. and S. Souza. 1984. "Sediment Metal Accumulation in a Suburban Lake." In *Lake and Reservoir Management*. US EPA 440-5-84-001.
- McComas, S. 1993. *Lakesmarts: The First Lake Maintenance Handbook*. The Terrene Institute. Washington, D.C.
- Payne, F., C. Laurin, K. Thornton and G. Saul. 1991. *A Strategy for Evaluating In-lake Treatment Effectiveness and Longevity*. Terrene Institute. Washington, D.C.
- North American Lake Management Society (NALMS). 2001. *Frequently Asked Questions About Lakes*. website: <http://www.nalms.org>
- Schueler, T. 1994. "The Pollutant Dynamics of Pond Muck." *Watershed Protection Techniques*. 1(2): 39-46.
- Thornton, M. 1984. "Regional Comparisons of Lakes and Reservoirs: Geology, Climatology, and Morphology." *Lake and Reservoir Management*. US EPA 440-5-84-001. pp 261-265.
- United States Environmental Protection Agency (US EPA). 1980. *Our Nation's Lakes*. Office of Water. Washington, D.C. EPA-440-5-80-009.
- United States Environmental Protection Agency (US EPA). 1986. *Quality Criteria for Water - 1986*. Office of Water. Washington, D.C. EPA-440-5-86-001.
- Van der Leeden, F., F. Troise and D. Todd. 1990. *Water Encyclopedia*. 2nd edition. Lewis Publishers.
- Van Metre, P., B. Mahler and E. Furlong. 2000. "Urban Sprawl Leaves its PAH Signature." *Environmental Science Technology*. 34(19): 4064-4070.
- Walker, W. 1984. "Empirical Prediction of Chlorophyll *a* in Reservoirs." *Lake and Reservoir Management*. US EPA 440-5-84-001. pp 281 - 289.
- Wetzel, R. 1990. "Reservoir Ecosystems: Conclusions and Speculation." *Reservoir Limnology: Ecological Perspectives*. K. Thorton, B. Kimmel and F. Payne, editors. John Wiley and Sons. New York. pp 227 - 238.